MATERIAL	TOTAL WEIGHT
Aluminum 6061	29.39 lbmass

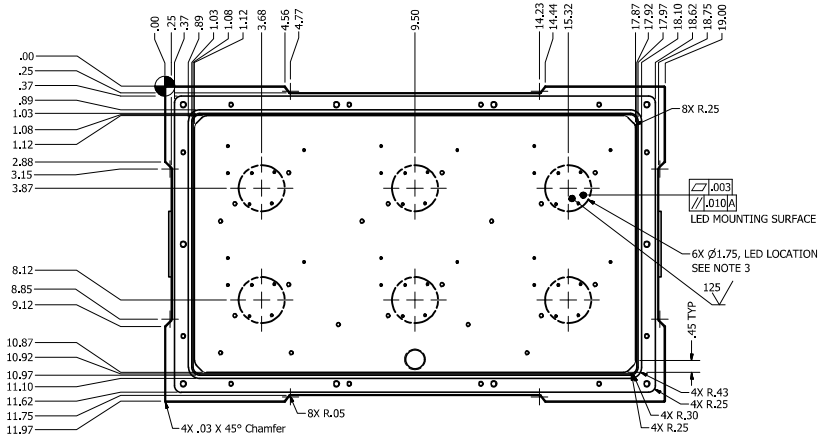

FRONT

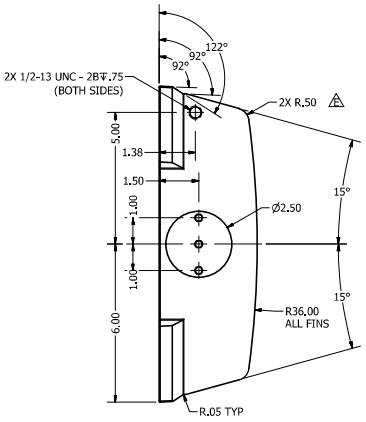

SIDE

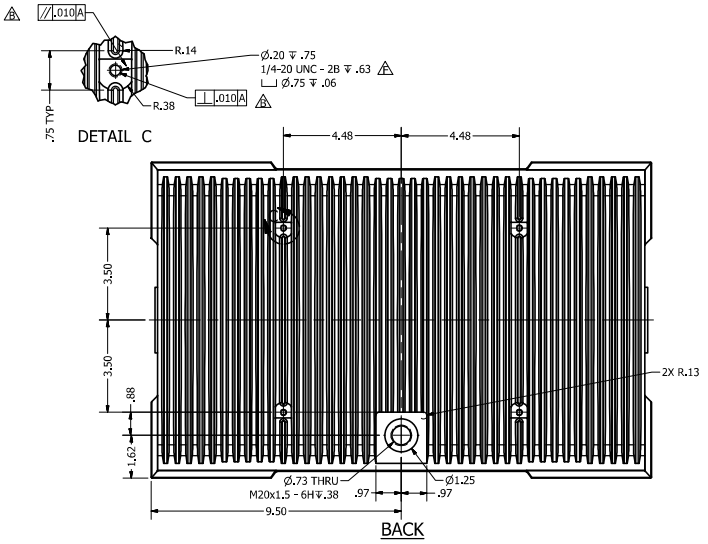

BACK

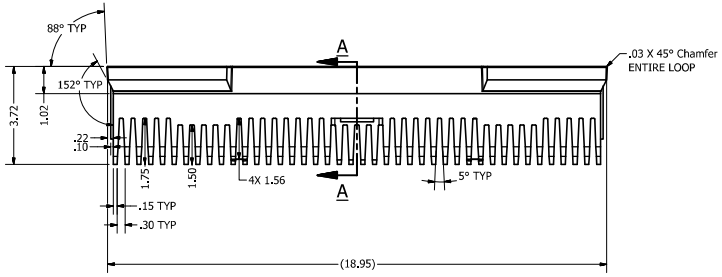

BOTTOM

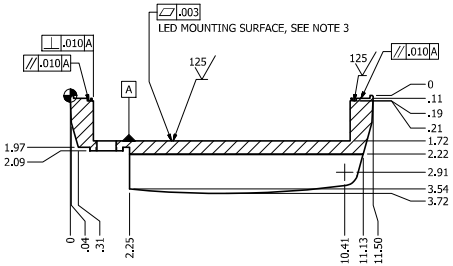

SECTION A-A
(DETAIL OF FINS)

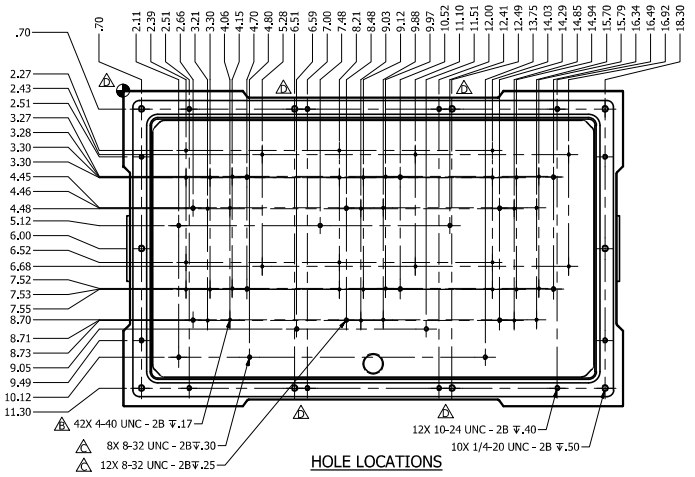

HOLE LOCATIONS

NOTES:

1. MAXIMUM RADII FOR INTERNAL CAVITY TO BE 0.020" UNLESS OTHERWISE SPECIFIED.

2. DEBURR AND REMOVE ALL SHARP EDGES.

3. SURFACE IN THE LED MOUNTING AREA AS INDICATED MUST MAINTAIN FLATNESS AND SURFACE FINISH.

REVISION HISTORY

REV	DESCRIPTION	REVISED BY	APPRVD BY	DATE
A	INITIAL RELEASE	MTW		5 AUG 2014
B	REVISED TO ADD CABLE TIE HOLES AND TOLERANCES	MTW		21 AUG 2014
C	REVISED ORIGIN LOCATION, ADDED HOLES FOR ALTERNATE OPTIC	MTW		1 OCT 2014
D	REVISED LOCATION OF HOLES AND ORIGIN LOCATION OF HOLE LOCATIONS VIEW	MTW		19 NOV 2014
E	REVISED TO SHOW RADIUS CALL OUT ON HOUSING	MTW		8 DEC 2014
F	REVISED TO CALL OUT HOLE INFORMATION	MTW		3 MAR 2015

SHEET SIZE D
ALL RIGHTS RESERVED REV A
ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
DO NOT SCALE DRAWING
TOLERANCE UNLESS NOTED:
X ±.060
.X ±.030
.XX ±.010
.XXX ±.005
FRACTIONS (X/X) ±1/32
ANGLES ±1/2°

PROJECT	D-RAY-X60
DATE	8/6/2014
DRAWN	MTW
CHECKED	

HOUSING

DWG. NO. D-RAY-X60-01M

SHEET 1 OF 1

REV F